




**CABLES SPECIFICATION :**

KASPER CABLE		SPECIFICATION			
Cable Name	K-SUB				
Model No.	K-SUB/50				
<b>SPECIFICATION</b>	[(20/0.15OFC+PE)*2C+Cotton Yarn+AL+B16/8/0.10BC+PVC]*1C OD:6.5mm Matt Red				
<b>LENGTH</b>	50Meters/Minimum	<b>Qty/Carton</b>	2 Spools		
<b>SPOOL SIZE</b>	PK-200*100*120*5mm	<b>Net Weight</b>	6.6 Kgs		
<b>SPOOL STICKER</b>	YES	<b>Gross Weight</b>	7.1 Kgs		
<b>In Wall</b>	YES	<b>Measure</b>	0.47'		
<b>MANUFACTURE STANDARD</b>					
Item	Description/ Color	Material	Thickness	Outer Diameter	Shape
<b>Conductor</b>	20/0.15	OFC		0.77mm±0.1	
<b>Inner Jacket</b>	Red/Blue	PE	0.31mm±0.1	1.4mm±0.1	Round
<b>Filler</b>	Cotton Yarn				
<b>Shield</b>	AL	PVC	0.04mm±0.1	2.95mm±0.1	
<b>Braiding</b>	B16/8/0.10	OFC	0.40mm±0.1	3.35mm±0.1	
<b>Jacket</b>	Matt Red	PVC	1.57mm±0.1	6.5mm±0.1	Round
<b>Printing</b>	Yes				
<b>Printing Text</b>	>>> KAPER • K-SUB • HIGH DEFINITION 22AWG PURE OFC SUBWOOFER CABLE >>>				
<b>Computer jet printing</b>	00m    00m~49m    49m				

## DRAWING

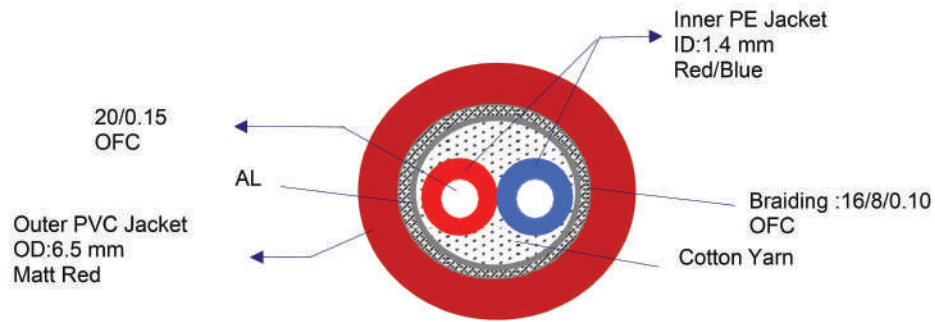

## CHARACTERISTICS

Test Report:

**\*Conductor Resistance**

0.05670  $\Omega$ /M

**\*capacitance**

65.94 PF/M ( )    121.88 PF/M (Red)    122.556 PF/M (Blue)

**\*Inductance**

1.3713  $\mu$ H/M

## CABLE PICTURE

