


Power Amplifier (Class H)

HP-21000C

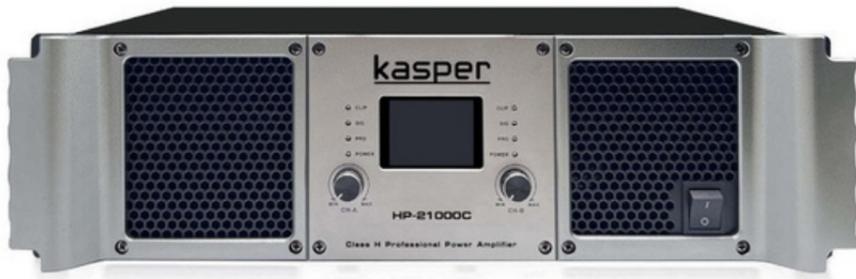

Description	HP-21000C Power Amplifiers: 2x2000 Watts Bridge Mode Pure Copper Transformer
Size	3U
Number of Output CH	2
Output Connection Type	Speakon & Binding Posts
Output Configuration	4x1000W @ 8Ω
Max Output Power	4x1500 @ 4Ω; 2x2000 @ 2Ω
Input Power	1100W
Frequency Responses	20Hz - 25kHz (-1dB, -3dB)
Input Impedance	20kΩ (10kΩ unbalanced)
THD+Noise	<0.1% @1kHz Full Power
SNR	>85dB 20Hz-20kHz @ 1W/4Ω
Input Connection Type	XLR3, Balanced
Attenuators	Front Panel Knobs per Channel
AC Mains Requirement	100-240V @ 50-60Hz
AC Main Connector	AC Socket Connector (IEC)
Dimensions (W*H*D)	58 cm * 57.5 cm * 19.5 cm
Shipping Weight	40 kg